


□ □ □ □ □ □ □ □ □ □ □ □ 5

□ □ □ □ □ □ □ □	6
□ □ □ □ □	6
□ □	7
□ □ □ □ □ □ □	8
□ □ □ □	11
□ □ □ □ □ □	21
□ □	24

[illegible]

[illegible][illegible][illegible]



OFF AC
AC



OFF AC
AC



15
15



ON



□ □ □ □

[illegible][illegible]

OFF **AC**

OFF **AC**

[illegible]

□ □ □ □



40°C


[illegible]

10°C

[illegible][illegible]

□ □ □ □ □ □ □ □ □ □

[illegible]




- □ □ □ □ □ ... 1□



- □ □ □ □ □ □

- FTD

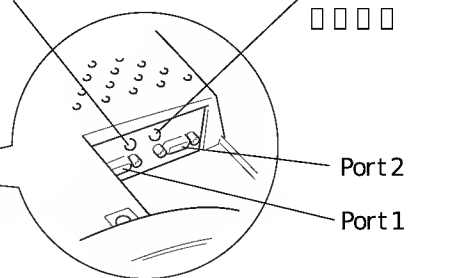




- Port 1 Port 2



-
- A diagram showing a power cord with a two-pronged plug being inserted into a standard wall outlet. An arrow points from the plug towards the outlet, indicating the direction of insertion.

- [illegible]

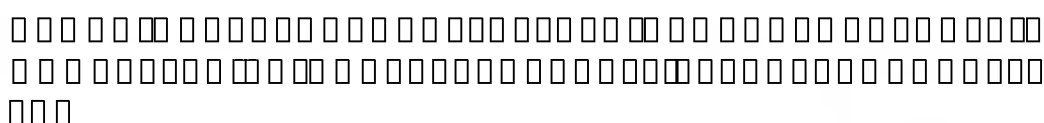

3 **LD Utility Disk**

4 **(H)**

5 **(B)**

6 **(N)** **ftd.inf** **OK**

7 **A** **OK**

8 **(L)** **MLCO FTD-GT17-A** **OK**

FTD **P11**

WindowsNT/Windows3.1/ DOS

WindowsNT/Windows3.1/ DOS **FTD** **P11**


Macintosh

FTD **Macintosh** **FTD-CNA** **D-sub15** **3** **RGB**

1 **14678 ON**

2 **FTD**

3 **Macintosh**


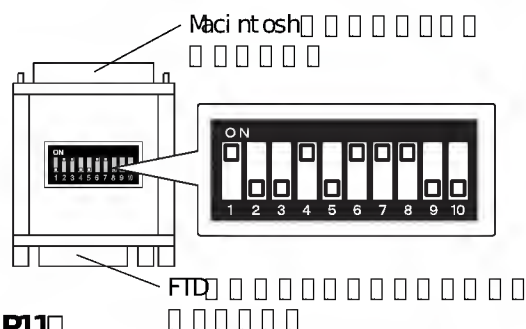


FTD **P11**

* **AUTO ADJUST**

FTD


-



次のページへ続く



FTD CF FTD

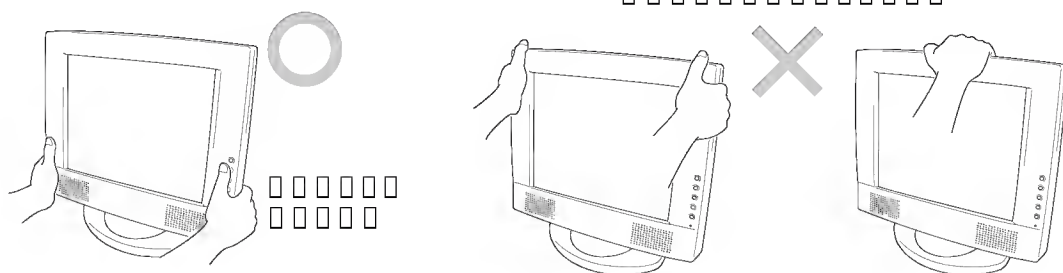

-


-

2 3 P22

- 1280×1024 SXGA

-

1280×1024 P16 P13

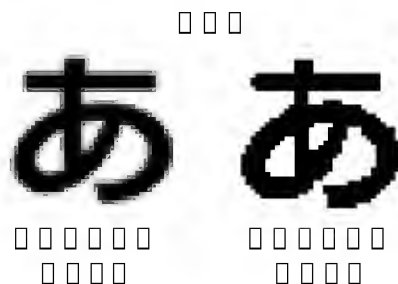

-

..... OS

-

4W DPMS VESA

-